


MODEL NO : WLA-7121

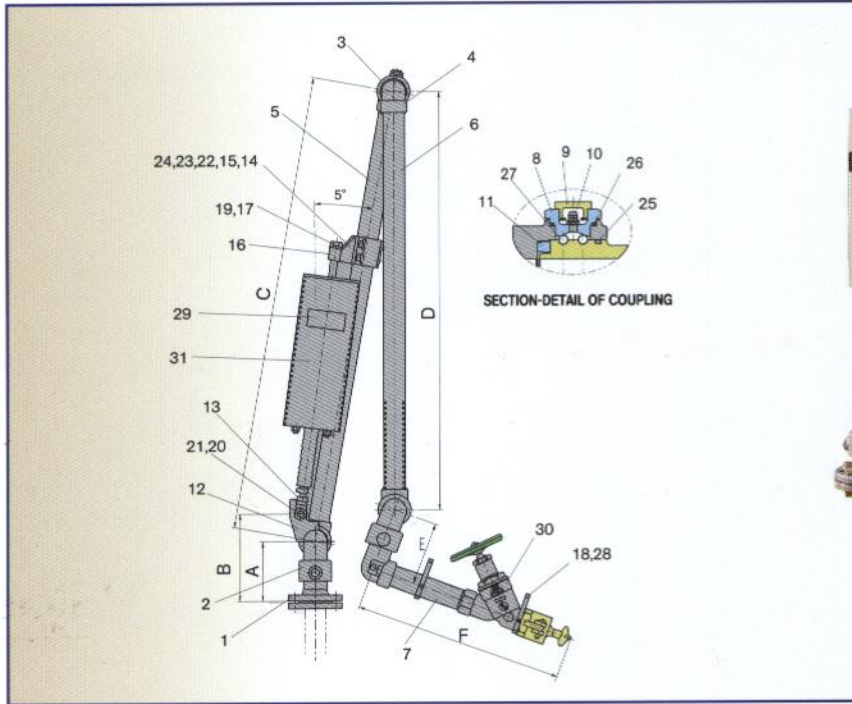

MATERIAL

| NO. | PART NAME | MATERIAL | NO. | PART NAME | MATERIAL |
|-----|-----------------|----------|-----|-------------------|----------|
| 1 | FLANGE COUPLING | SCPH2 | 17 | WASHER | STS304 |
| 2 | COUPLING - A | SCPH2 | 18 | HANDLE | SS41 |
| 3 | COUPLING - B | SCPH2 | 19 | ADJUST BOLT | S20C |
| 4 | COUPLING - C | SCPH2 | 20 | BOLT | S45C |
| 5 | PIPE. A | STPG370 | 21 | NUT | S45C |
| 6 | PIPE. B | STPG370 | 22 | BOLT | S45C |
| 7 | PIPE. C | STPG370 | 23 | SPRING WASHER | SUP6 |
| 8 | RETAINER | SS41 | 24 | NUT | S45C |
| 9 | RETAINER CAP | SS41 | 25 | O-RING | NBR |
| 10 | NIPPLE | S.T.D | 26 | O-RING | NBR |
| 11 | PACKING | H-NBR | 27 | BALL | SUJ2 |
| 12 | STOPPER | SS41 | 28 | SET SCREW | SCM4 |
| 13 | ROD BRACKET | GCD-S | 29 | NAME PLATE | STS304 |
| 14 | UPPER SUPPORT | SS41 | 30 | Y-VALVE | S.T.D |
| 15 | LOWER SUPPORT | SS41 | 31 | BALANCE-UNIT ASSY | S.T.D |
| 16 | GUIDE RING | STPG370 | | | |

SPECIFICATION

- Application:
safe connection between tank lorry and storage tank
- Hydrostatic test pressure : 2.94 MPa
- Pneumatic test pressure : 2.15 MPa
- Maximum filling distance : 3m
- Arm operation angle : 5° ~ 87°
- Joint quantity : 5
- Fluid : LPG

DIMENSION

unit : mm

| SIZE | A | B | C | D | E | F |
|------|-----|-----|------|------|-----|-----|
| 25A | 172 | 252 | 1319 | 1363 | 136 | 568 |
| 50A | 172 | 252 | 1319 | 1205 | 203 | 615 |